



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.60 GHz, AMD EPYC 9115)

SPECspeed®2017_int_base = 17.5

SPECspeed®2017_int_peak = 17.6

CPU2017 License: 3


Test Date: Dec-2024

Test Sponsor: HPE

Hardware Availability: Jan-2025

Tested by: HPE

Software Availability: Oct-2024

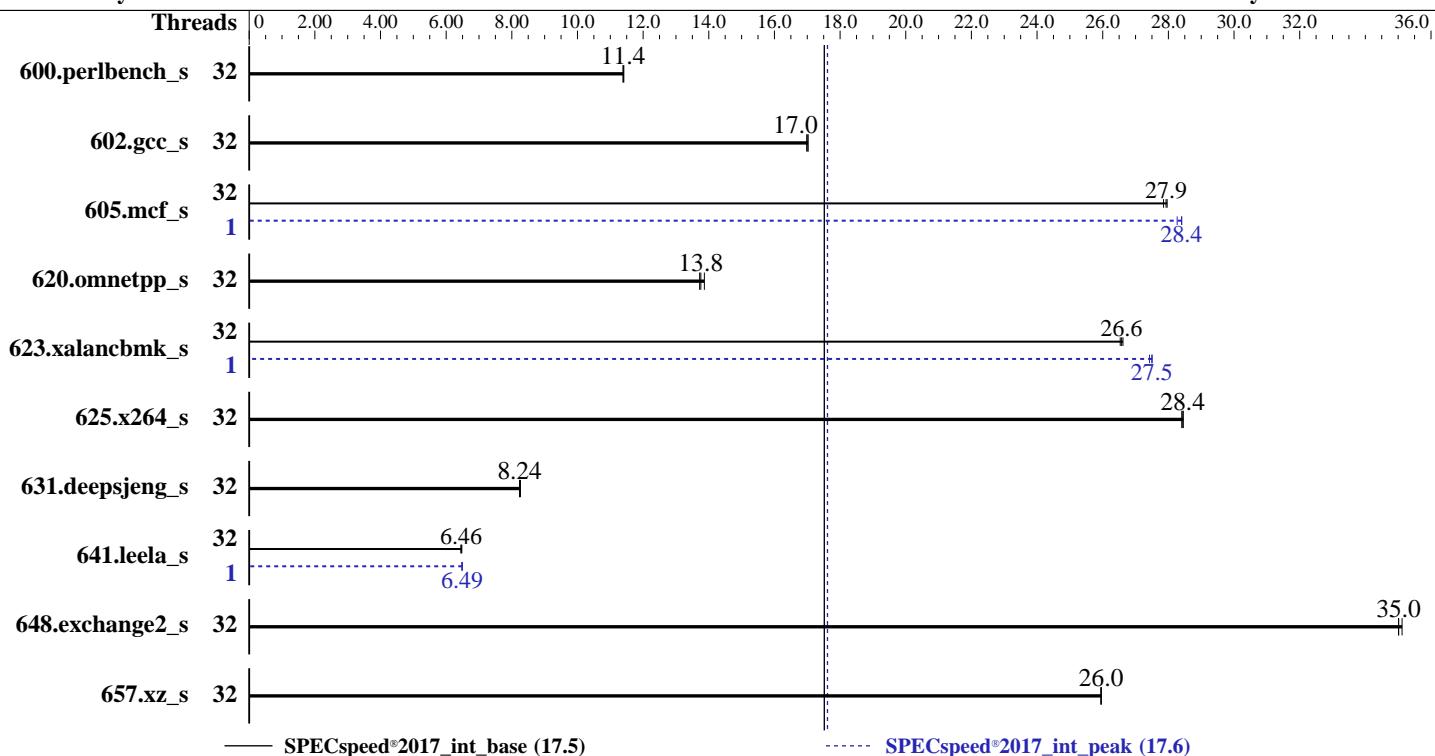

Hardware

CPU Name: AMD EPYC 9115
 Max MHz: 4100
 Nominal: 2600
 Enabled: 32 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 64 MB I+D on chip per chip,
 32 MB shared / 8 cores
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R,
 running at 6000)
 Storage: 1 x 480 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Compiler: Kernel 6.4.0-150600.21-default
 Parallel: C/C++/Fortran: Version 5.0.0 of AOCC
 Firmware: HPE BIOS Version v2.20 10/31/2024 released Oct-2024
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.60 GHz, AMD EPYC 9115)

SPECspeed®2017_int_base = 17.5

SPECspeed®2017_int_peak = 17.6

CPU2017 License: 3

Test Date: Dec-2024

Test Sponsor: HPE

Hardware Availability: Jan-2025

Tested by: HPE

Software Availability: Oct-2024

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	156	11.4	156	11.4	<u>156</u>	<u>11.4</u>	32	156	11.4	156	11.4	<u>156</u>	<u>11.4</u>		
602.gcc_s	32	234	17.0	<u>234</u>	<u>17.0</u>	234	17.0	32	234	17.0	<u>234</u>	<u>17.0</u>	234	17.0		
605.mcf_s	32	169	28.0	169	27.9	<u>169</u>	<u>27.9</u>	1	166	28.4	167	28.3	<u>166</u>	<u>28.4</u>		
620.omnetpp_s	32	118	13.9	119	13.7	<u>119</u>	<u>13.8</u>	32	118	13.9	119	13.7	<u>119</u>	<u>13.8</u>		
623.xalancbmk_s	32	53.2	26.6	53.4	26.5	<u>53.3</u>	<u>26.6</u>	1	<u>51.5</u>	<u>27.5</u>	51.5	27.5	<u>51.7</u>	<u>27.4</u>		
625.x264_s	32	62.1	28.4	62.0	28.5	<u>62.0</u>	<u>28.4</u>	32	62.1	28.4	62.0	28.5	<u>62.0</u>	<u>28.4</u>		
631.deepsjeng_s	32	<u>174</u>	<u>8.24</u>	174	8.24	173	8.26	32	<u>174</u>	<u>8.24</u>	174	8.24	<u>173</u>	<u>8.26</u>		
641.leela_s	32	263	6.48	<u>264</u>	<u>6.46</u>	265	6.45	1	<u>263</u>	<u>6.49</u>	263	6.49	<u>263</u>	<u>6.48</u>		
648.exchange2_s	32	84.0	35.0	<u>84.0</u>	<u>35.0</u>	83.7	35.1	32	84.0	35.0	<u>84.0</u>	<u>35.0</u>	83.7	35.1		
657.xz_s	32	<u>238</u>	<u>26.0</u>	238	26.0	238	25.9	32	<u>238</u>	<u>26.0</u>	238	26.0	<u>238</u>	<u>25.9</u>		
SPECspeed®2017_int_base = 17.5																
SPECspeed®2017_int_peak = 17.6																

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
 To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11
(2.60 GHz, AMD EPYC 9115)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017_int_base = 17.5

SPECspeed®2017_int_peak = 17.6

Test Date: Dec-2024

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-31"
LD_LIBRARY_PATH =
    "/home/cpu2017/amd_speed_aocc500_znver5_A/lib:/home/cpu2017/amd_speed_aocc500_znver5_A/lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "32"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 641.leela_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Deterministic set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

Thermal Configuration set to Maximum Cooling

AMD SMT Option set to Disabled

NUMA memory domains per socket set to Two memory domains per socket

Workload Profile set to Custom

Power Regulator set to OS Control Mode

The reference code/AGESA version used in this ROM is version Turin-PI 1.0.0.2

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Thu Dec 5 09:41:23 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11
(2.60 GHz, AMD EPYC 9115)

SPECspeed®2017_int_base = 17.5

SPECspeed®2017_int_peak = 17.6

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2024

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
-----
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
-----
2. w
09:41:23 up 5 min, 1 user, load average: 1.03, 1.07, 0.59
USER      TTY      FROM          LOGIN@     IDLE     JCPU    PCPU WHAT
root      pts/0    172.17.1.109    22Apr24 11.00s  0.88s  0.16s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
-----
3. Username
From environment variable $USER: root
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 3094775
max locked memory        (kbytes, -l) 2097152
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 3094775
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
-----
5. sysinfo process ancestry
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.60 GHz, AMD EPYC 9115)

SPECspeed®2017_int_base = 17.5

SPECspeed®2017_int_peak = 17.6

CPU2017 License: 3

Test Date: Dec-2024

Test Sponsor: HPE

Hardware Availability: Jan-2025

Tested by: HPE

Software Availability: Oct-2024

Platform Notes (Continued)

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
python3 ./run_intspeed.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.041/templogs/preenv.intspeed.041.0.log --lognum 041.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

-----
6. /proc/cpuinfo
    model name      : AMD EPYC 9115 16-Core Processor
    vendor_id       : AuthenticAMD
    cpu family     : 26
    model          : 2
    stepping        : 1
    microcode      : 0xb00211a
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores      : 16
    siblings        : 16
    2 physical ids (chips)
    32 processors (hardware threads)
    physical id 0: core ids 0-15
    physical id 1: core ids 0-15
    physical id 0: apicids 0-15
    physical id 1: apicids 16-31
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----
7. lscpu
```

```
From lscpu from util-linux 2.39.3:
Architecture:                           x86_64
CPU op-mode(s):                         32-bit, 64-bit
Address sizes:                          52 bits physical, 57 bits virtual
Byte Order:                            Little Endian
CPU(s):                                32
On-line CPU(s) list:                   0-31
Vendor ID:                            AuthenticAMD
BIOS Vendor ID:                        Advanced Micro Devices, Inc.
Model name:                            AMD EPYC 9115 16-Core Processor
BIOS Model name:                       AMD EPYC 9115 16-Core Processor
BIOS CPU family:                      107
CPU family:                            26
Model:                                 2
Thread(s) per core:                   1
Core(s) per socket:                  16
Socket(s):                            2
Stepping:                             1
Frequency boost:                      enabled
CPU(s) scaling MHz:                 108%
CPU max MHz:                          2600.0000
CPU min MHz:                          1500.0000
CPU @ 2.6GHz
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.60 GHz, AMD EPYC 9115)

SPECspeed®2017_int_base = 17.5

SPECspeed®2017_int_peak = 17.6

CPU2017 License: 3

Test Date: Dec-2024

Test Sponsor: HPE

Hardware Availability: Jan-2025

Tested by: HPE

Software Availability: Oct-2024

Platform Notes (Continued)

BogoMIPS:

5192.29

Flags:

```
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmil avx2
smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total
cqmq_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaverptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassist pausefilter
pfthreshold avic v_vmsave_vmlload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pkru ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap
```

Virtualization:

AMD-V

L1d cache:

1.5 MiB (32 instances)

L1i cache:

1 MiB (32 instances)

L2 cache:

32 MiB (32 instances)

L3 cache:

128 MiB (4 instances)

NUMA node(s):

4

NUMA node0 CPU(s):

0-7

NUMA node1 CPU(s):

8-15

NUMA node2 CPU(s):

16-23

NUMA node3 CPU(s):

24-31

Vulnerability Gather data sampling:

Not affected

Vulnerability Itlb multihit:

Not affected

Vulnerability Llft:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Reg file data sampling:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec rstack overflow:

Not affected

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP

disabled; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected

Vulnerability Srbds:

Not affected

Vulnerability Tsx sync abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	16	Unified	2	1024	1	64
L3	32M	128M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-7

node 0 size: 193177 MB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.60 GHz, AMD EPYC 9115)

SPECspeed®2017_int_base = 17.5

SPECspeed®2017_int_peak = 17.6

CPU2017 License: 3

Test Date: Dec-2024

Test Sponsor: HPE

Hardware Availability: Jan-2025

Tested by: HPE

Software Availability: Oct-2024

Platform Notes (Continued)

```
node 0 free: 192676 MB
node 1 cpus: 8-15
node 1 size: 193533 MB
node 1 free: 192802 MB
node 2 cpus: 16-23
node 2 size: 193533 MB
node 2 free: 193072 MB
node 3 cpus: 24-31
node 3 size: 193474 MB
node 3 free: 193102 MB
node distances:
node 0 1 2 3
 0: 10 12 32 32
 1: 12 10 32 32
 2: 32 32 10 12
 3: 32 32 12 10

-----
9. /proc/meminfo
MemTotal: 792288120 kB

-----
10. who -r
run-level 3 Apr 22 17:30

-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target Status
multi-user running

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled apparmor audtfd cron getty@ irqbalance issue-generator kbdsettings postfix purge-kernels
rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny
enabled-runtime systemd-remount-fs
disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell grub2-once
haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load lunmask rpmconfigcheck
serial-getty@ systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
indirect pcsd systemd-userdbd wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=43ae4fbb-2791-43f8-9772-fc23423b366a
splash=silent
mitigations=auto
quiet
security=apparmor

-----
14. cpupower frequency-info
analyzing CPU 27:
    current policy: frequency should be within 1.50 GHz and 2.60 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
boost state support:
Supported: yes
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.60 GHz, AMD EPYC 9115)

SPECspeed®2017_int_base = 17.5

SPECspeed®2017_int_peak = 17.6

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2024

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Active: yes

15. tuned-adm active
No current active profile.

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

17. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 btrfs 445G 27G 415G 7% /home

21. /sys/devices/virtual/dmi/id
Vendor: HPE
Product: ProLiant DL365 Gen11

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11
(2.60 GHz, AMD EPYC 9115)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017_int_base = 17.5

SPECspeed®2017_int_peak = 17.6

Test Date: Dec-2024

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Product Family: ProLiant
Serial: DL365GEN11-010

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Micron MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400, configured at 6000

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 2.20
BIOS Date: 10/31/2024
BIOS Revision: 2.20
Firmware Revision: 1.63

Compiler Version Notes

=====

C 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)	657.xz_s(base, peak)
--	----------------------

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C++ 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)	641.leela_s(base, peak)
---	-------------------------

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

Fortran 648.exchange2_s(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.60 GHz, AMD EPYC 9115)

SPECspeed®2017_int_base = 17.5

SPECspeed®2017_int_peak = 17.6

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2024

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11
(2.60 GHz, AMD EPYC 9115)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017_int_base = 17.5

SPECspeed®2017_int_peak = 17.6

Test Date: Dec-2024

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11
(2.60 GHz, AMD EPYC 9115)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017_int_base = 17.5

SPECspeed®2017_int_peak = 17.6

Test Date: Dec-2024

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: basepeak = yes

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fvec/lib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdaloc -lflang
```

```
625.x264_s: basepeak = yes
```

```
657.xz_s: basepeak = yes
```

C++ benchmarks:

```
620.omnetpp_s: basepeak = yes
```

```
623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fvec/lib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdaloc-ext -lflang
```

```
631.deepsjeng_s: basepeak = yes
```

```
641.leela_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fvec/lib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11
(2.60 GHz, AMD EPYC 9115)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017_int_base = 17.5

SPECspeed®2017_int_peak = 17.6

Test Date: Dec-2024

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.0.html>
<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.0.xml>
<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-12-04 23:11:22-0500.

Report generated on 2025-01-28 22:04:50 by CPU2017 PDF formatter v6716.

Originally published on 2025-01-28.