



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen11

(3.00 GHz, Intel Xeon 6357P)

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = 120

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

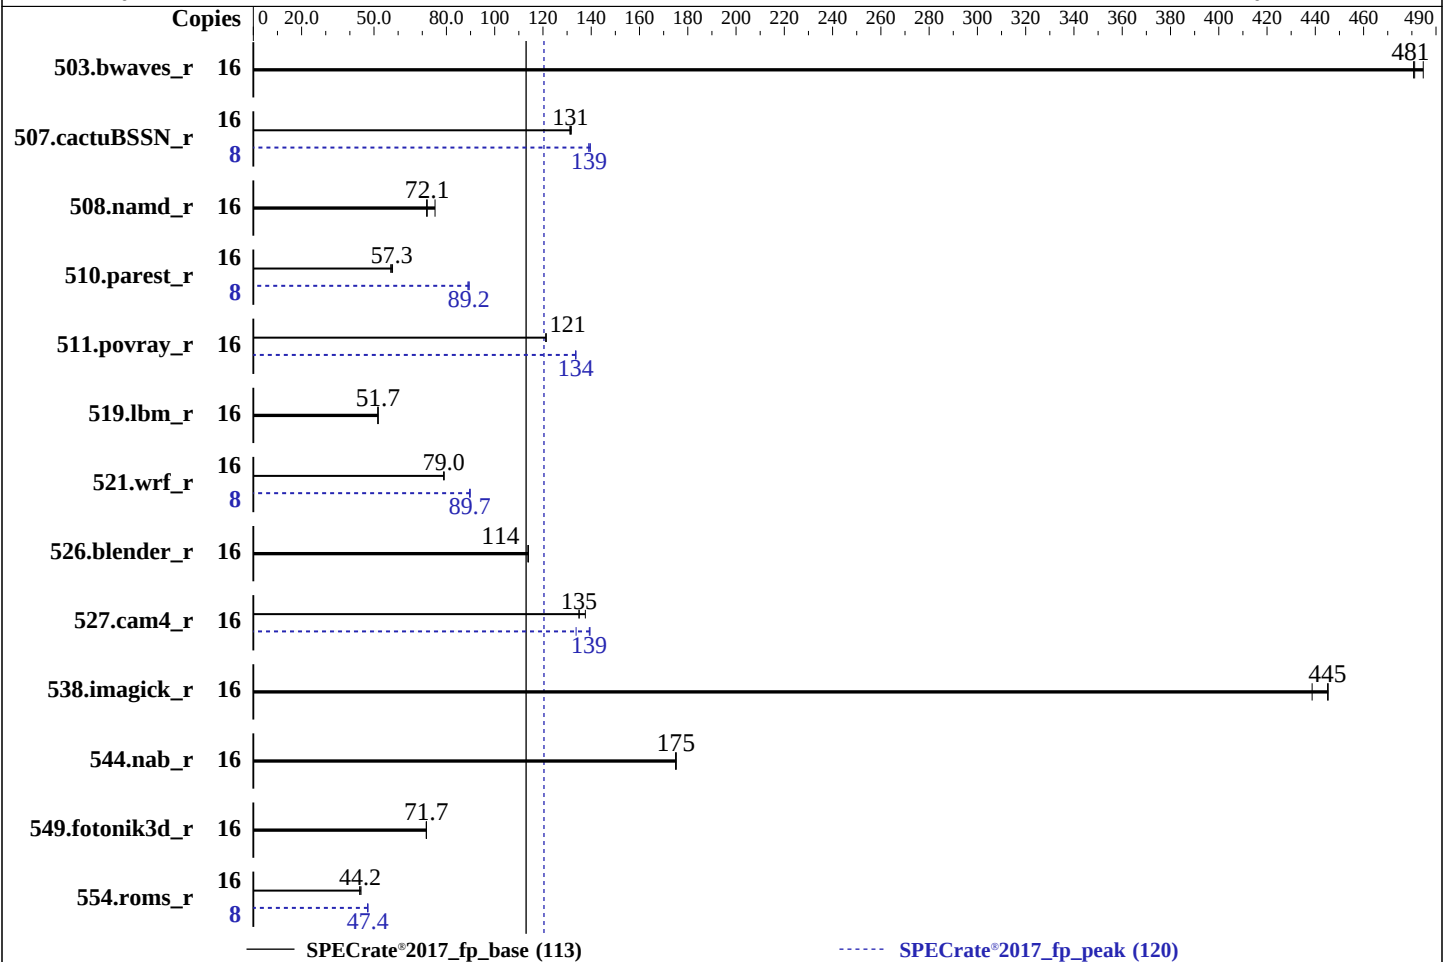

Hardware

CPU Name: Intel Xeon 6357P
Max MHz: 5400
Nominal: 3000
Enabled: 8 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 24 MB I+D on chip per chip
Other: None
Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5600B-E, running at 4400 , orderable using HPE part# P64339-B21)
Storage: 1 x 480 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: HPE BIOS Version v2.10 12/06/2024 released Dec-2024
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen11

(3.00 GHz, Intel Xeon 6357P)

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = 120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	331	485	334	481	<u>333</u>	<u>481</u>	16	331	485	334	481	<u>333</u>	<u>481</u>
507.cactuBSSN_r	16	154	132	<u>154</u>	<u>131</u>	154	131	8	72.9	139	<u>72.8</u>	<u>139</u>	72.5	140
508.namd_r	16	212	71.8	202	75.3	<u>211</u>	<u>72.1</u>	16	212	71.8	202	75.3	<u>211</u>	<u>72.1</u>
510.parest_r	16	735	56.9	726	57.7	<u>730</u>	<u>57.3</u>	8	235	88.9	234	89.5	<u>235</u>	<u>89.2</u>
511.povray_r	16	308	121	308	121	<u>308</u>	<u>121</u>	16	280	134	280	134	<u>280</u>	<u>134</u>
519.lbm_r	16	<u>326</u>	<u>51.7</u>	326	51.7	327	51.6	16	<u>326</u>	<u>51.7</u>	326	51.7	327	51.6
521.wrf_r	16	454	78.9	<u>454</u>	<u>79.0</u>	454	79.0	8	200	89.8	<u>200</u>	<u>89.7</u>	200	89.6
526.blender_r	16	214	114	<u>214</u>	<u>114</u>	214	114	16	214	114	<u>214</u>	<u>114</u>	214	114
527.cam4_r	16	203	138	207	135	<u>207</u>	<u>135</u>	16	<u>201</u>	<u>139</u>	209	134	201	140
538.imagick_r	16	<u>89.4</u>	<u>445</u>	90.7	439	89.4	445	16	<u>89.4</u>	<u>445</u>	90.7	439	89.4	445
544.nab_r	16	154	175	154	175	<u>154</u>	<u>175</u>	16	154	175	154	175	<u>154</u>	<u>175</u>
549.fotonik3d_r	16	<u>870</u>	<u>71.7</u>	869	71.7	870	71.7	16	<u>870</u>	<u>71.7</u>	869	71.7	870	71.7
554.roms_r	16	577	44.1	<u>575</u>	<u>44.2</u>	570	44.6	8	269	47.3	<u>268</u>	<u>47.4</u>	268	47.5

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = 120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen11

(3.00 GHz, Intel Xeon 6357P)

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = 120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

General Notes (Continued)

is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

Workload Profile set to General Throughput Compute
Thermal Configuration set to Maximum Cooling
Enhanced Processor Performance Profile set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sat Feb 15 01:39:52 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
-
2. w
01:39:52 up 4:23, 6 users, load average: 10.40, 14.65, 15.50
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
-
3. Username
From environment variable \$USER: root

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen11

(3.00 GHz, Intel Xeon 6357P)

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = 120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 256709
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 256709
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/fprate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=16 -c
ic2024.1-lin-core-avx2-rate-20240308.cfg --define smt-on --define cores=8 --define physicalfirst --define
no-numa --tune base,peak -o all --define drop_caches fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=16 --configfile
ic2024.1-lin-core-avx2-rate-20240308.cfg --define smt-on --define cores=8 --define physicalfirst --define
no-numa --tune base,peak --output_format all --define drop_caches --nopower --runmode rate --tune
base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6357P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 183
stepping       : 1
microcode      : 0x12c
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores      : 8
siblings       : 16
1 physical ids (chips)
16 processors (hardware threads)
physical id 0: core ids 0-7
physical id 0: apicids 0-15
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----
7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:          x86_64
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen11

(3.00 GHz, Intel Xeon 6357P)

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = 120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 48 bits virtual
Byte Order: Little Endian
CPU(s): 16
On-line CPU(s) list: 0-15
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) 6357P
BIOS Model name: Intel(R) Xeon(R) 6357P To Be Filled By O.E.M. CPU @ 3.0GHz
BIOS CPU family: 179
CPU family: 6
Model: 183
Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 1
Stepping: 1
BogoMIPS: 5990.40
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves split_lock_detect user_shstk avx_vnni dtherm ida arat pln pts hfi vmmi umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid movdiri movdir64b fsrm md_clear serialize pconfig arch_lbr ibt flush_l1d arch_capabilities
Virtualization: VT-x
L1d cache: 384 KiB (8 instances)
L1i cache: 256 KiB (8 instances)
L2 cache: 16 MiB (8 instances)
L3 cache: 24 MiB (1 instance)
NUMA node(s): 1
NUMA node0 CPU(s): 0-15
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	384K	12	Data	1	64	1	64
L1i	32K	256K	8	Instruction	1	64	1	64
L2	2M	16M	16	Unified	2	2048	1	64
L3	24M	24M	12	Unified	3	32768	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen11

(3.00 GHz, Intel Xeon 6357P)

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = 120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-15
node 0 size: 64202 MB
node 0 free: 51224 MB
node distances:
node 0
0: 10
```

9. /proc/meminfo

MemTotal: 65743156 kB

10. who -r

run-level 3 Feb 14 10:46

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE      UNIT FILES
enabled    apparmor auditd cron getty@ irqbalance issue-generator kbdsettings lvm2-monitor postfix
            purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
            wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled   blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
            grub2-once haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load lunmask rpmconfigcheck
            serial-getty@ systemd-boot-check-no-failures systemd-confext systemd-network-generator
            systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect   systemd-userdbd wickedd
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=a6e890e9-5edf-48d7-8bed-5dfa2a74df8c
splash=silent
resume=/dev/disk/by-uuid/afc21d61-6b6e-462f-bfa8-ef7c975f7ad3
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 6:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

15. sysctl

```
kernel.numa_balancing      0
kernel.randomize_va_space  2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen11

(3.00 GHz, Intel Xeon 6357P)

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = 120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
vm.compaction_proactiveness      20
vm.dirty_background_bytes         0
vm.dirty_background_ratio        10
vm.dirty_bytes                    0
vm.dirty_expire_centisecs        3000
vm.dirty_ratio                    20
vm.dirty_writeback_centisecs     500
vm.dirtytime_expire_seconds      43200
vm.extfrag_threshold              500
vm.min_unmapped_ratio            1
vm.nr_hugepages                   0
vm.nr_hugepages_mempolicy         0
vm.nr_overcommit_hugepages       0
vm.swappiness                      60
vm.watermark_boost_factor        15000
vm.watermark_scale_factor         10
vm.zone_reclaim_mode              0
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
   defrag      always defer+madvise [madvise] never
   enabled     [always] madvise never
   hpage_pmd_size 2097152
   shmem_enabled always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs 60000
   defrag                 1
   max_ptes_none          511
   max_ptes_shared        256
   max_ptes_swap          64
   pages_to_scan          4096
   scan_sleep_millisecs  10000
```

```
-----
18. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP6
```

```
-----
19. Disk information
   SPEC is set to: /home/cpu2017
   Filesystem      Type  Size  Used Avail Use% Mounted on
   /dev/sda3       xfs   344G  48G  297G  14% /home
```

```
-----
20. /sys/devices/virtual/dmi/id
   Vendor:      HPE
   Product:     ProLiant DL20 Gen11
   Product Family: ProLiant
   Serial:      DA2G93DK88
```

```
-----
21. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen11

(3.00 GHz, Intel Xeon 6357P)

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = 120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

2x Hynix HMC688AGBEA084N 32 GB 2 rank 5600, configured at 4400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 2.10
BIOS Date: 12/06/2024
BIOS Revision: 2.10
Firmware Revision: 1.62

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen11

(3.00 GHz, Intel Xeon 6357P)

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = 120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Compiler Version Notes (Continued)

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen11

(3.00 GHz, Intel Xeon 6357P)

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = 120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen11

(3.00 GHz, Intel Xeon 6357P)

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = 120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen11

(3.00 GHz, Intel Xeon 6357P)

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = 120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

554.roms_r (continued):

```
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto  
-Ofast -ffast-math -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-CatlowRefresh-rev1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-CatlowRefresh-rev1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-15 01:39:51-0500.

Report generated on 2025-03-12 10:25:17 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-11.