



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.
KR1180V3 (AMD EPYC 9375F)

SPECspeed®2017_int_base = 20.0

SPECspeed®2017_int_peak = 20.5

CPU2017 License: 6865


Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

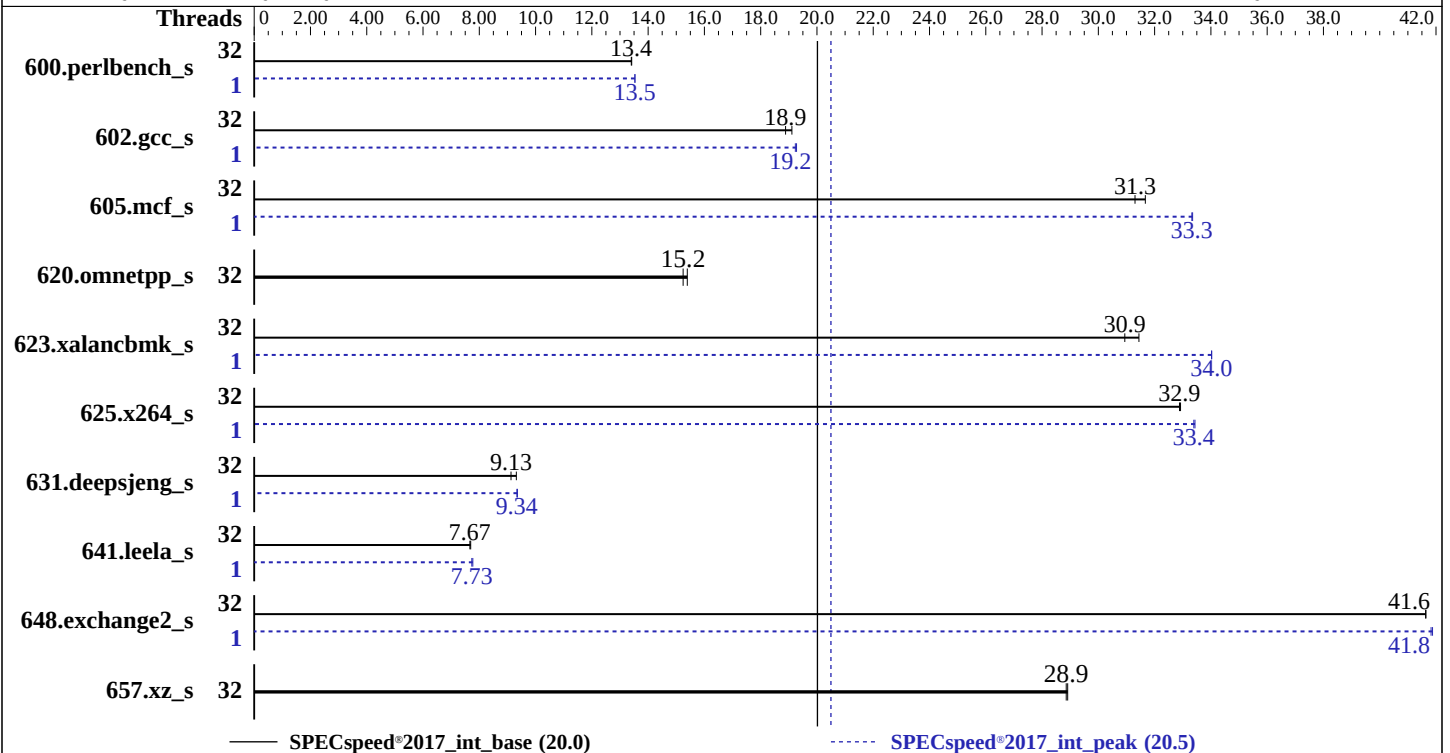

Hardware

CPU Name: AMD EPYC 9375F
Max MHz: 4800
Nominal: 3800
Enabled: 32 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 4 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage: 1 x 960 GB NVME SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: Version 01.04.00 released Dec-2024
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECspeed®2017_int_base = 20.0

KR1180V3 (AMD EPYC 9375F)

SPECspeed®2017_int_peak = 20.5

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	<u>132</u>	<u>13.4</u>	132	13.4			1	131	13.5	<u>131</u>	<u>13.5</u>		
602.gcc_s	32	<u>211</u>	<u>18.9</u>	208	19.1			1	207	19.3	<u>207</u>	<u>19.2</u>		
605.mcf_s	32	149	31.7	<u>151</u>	<u>31.3</u>			1	<u>142</u>	<u>33.3</u>	142	33.4		
620.omnetpp_s	32	<u>107</u>	<u>15.2</u>	106	15.4			32	<u>107</u>	<u>15.2</u>	106	15.4		
623.xalancbmk_s	32	<u>45.8</u>	<u>30.9</u>	45.1	31.4			1	<u>41.6</u>	<u>34.0</u>	41.6	34.0		
625.x264_s	32	53.6	32.9	<u>53.6</u>	<u>32.9</u>			1	52.8	33.4	<u>52.8</u>	<u>33.4</u>		
631.deepsjeng_s	32	154	9.32	<u>157</u>	<u>9.13</u>			1	153	9.36	<u>153</u>	<u>9.34</u>		
641.leela_s	32	<u>223</u>	<u>7.67</u>	222	7.69			1	220	7.77	<u>221</u>	<u>7.73</u>		
648.exchange2_s	32	<u>70.6</u>	<u>41.6</u>	70.6	41.6			1	<u>70.3</u>	<u>41.8</u>	70.2	41.9		
657.xz_s	32	214	28.9	<u>214</u>	<u>28.9</u>			32	214	28.9	<u>214</u>	<u>28.9</u>		

SPECspeed®2017_int_base = 20.0

SPECspeed®2017_int_peak = 20.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECspeed®2017_int_base = 20.0

KR1180V3 (AMD EPYC 9375F)

SPECspeed®2017_int_peak = 20.5

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-31"

LD_LIBRARY_PATH =

"/home/CPU2017/amd_speed_aocc500_znver5_A_lib/lib:/home/CPU2017/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "32"

Environment variables set by runcpu during the 600.perlbench_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 625.x264_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2_s peak run:

GOMP_CPU_AFFINITY = "0"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

SVM Mode = disable

DRAM Scrub time = disable

NUMA nodes per socket = NPS4

Determinism Slider = Power

cTDP = 500

Package Power Limit = 500

SMT = Disable

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECspeed®2017_int_base = 20.0

KR1180V3 (AMD EPYC 9375F)

SPECspeed®2017_int_peak = 20.5

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Mar 4 04:45:11 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. w
04:45:11 up 1 min, 1 user, load average: 0.90, 0.41, 0.15
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 04:44 15.00s 0.70s 0.04s /bin/bash ./amd_speed_aocc500_znver5_A1.sh

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3092301
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECspeed®2017_int_base = 20.0

KR1180V3 (AMD EPYC 9375F)

SPECspeed®2017_int_peak = 20.5

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 3092301
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 1 intspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 1 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.008/templogs/preenv.intspeed.008.0.log --lognum 008.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9375F 32-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping         : 1
microcode       : 0xb00211a
bugs             : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 32
siblings        : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-3,16-19,32-35,48-51,64-67,80-83,96-99,112-115
physical id 0: apicids 0-3,16-19,32-35,48-51,64-67,80-83,96-99,112-115
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	32
On-line CPU(s) list:	0-31
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9375F 32-Core Processor
BIOS Model name:	AMD EPYC 9375F 32-Core Processor
BIOS CPU family:	107
CPU family:	26
Model:	2
Thread(s) per core:	1

Unknown CPU @ 3.8GHz

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECspeed®2017_int_base = 20.0

KR1180V3 (AMD EPYC 9375F)

SPECspeed®2017_int_peak = 20.5

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Core(s) per socket: 32
Socket(s): 1
Stepping: 1
Frequency boost: enabled
CPU(s) scaling MHz: 79%
CPU max MHz: 4820.5068
CPU min MHz: 1500.0000
BogoMIPS: 7588.54
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_lld debug_swap
AMD-V
Virtualization: 1.5 MiB (32 instances)
L1d cache: 1 MiB (32 instances)
L1i cache: 32 MiB (32 instances)
L2 cache: 256 MiB (8 instances)
L3 cache: 4
NUMA node(s): 0-7
NUMA node0 CPU(s): 8-15
NUMA node1 CPU(s): 16-23
NUMA node2 CPU(s): 24-31
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECspeed®2017_int_base = 20.0

KR1180V3 (AMD EPYC 9375F)

SPECspeed®2017_int_peak = 20.5

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-7

node 0 size: 192947 MB

node 0 free: 192498 MB

node 1 cpus: 8-15

node 1 size: 193533 MB

node 1 free: 193208 MB

node 2 cpus: 16-23

node 2 size: 193533 MB

node 2 free: 193118 MB

node 3 cpus: 24-31

node 3 size: 193085 MB

node 3 free: 192649 MB

node distances:

node	0	1	2	3
0:	10	12	12	12
1:	12	10	12	12
2:	12	12	10	12
3:	12	12	12	10

9. /proc/meminfo

MemTotal: 791654544 kB

10. who -r

run-level 3 Mar 4 04:44

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump
	kdump-early kdump-notify nvme-fc-boot-connections nvmmf-autoconnect postfix purge-kernels
	rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
	wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebtables
	exchange-bmc-os-info fsidd grub2-once haveged hwloc-dump-hwdata ipmievdt issue-add-ssh-keys
	kexec-load nfs nfs-blkmap rpcbind rpmconfigcheck serial-getty@
	systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
	systemd-time-wait-sync systemd-timesyncd tuned
generated	jexec
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default

root=UUID=daf71402-9a22-417d-a498-881cf3539e73

splash=silent

mitigations=auto

quiet

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECspeed®2017_int_base = 20.0

KR1180V3 (AMD EPYC 9375F)

SPECspeed®2017_int_peak = 20.5

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

security=apparmor
crashkernel=384M,high
crashkernel=72M,low

14. cpupower frequency-info

analyzing CPU 17:

current policy: frequency should be within 1.50 GHz and 3.80 GHz.
The governor "performance" may decide which speed to use
within this range.

boost state support:

Supported: yes

Active: yes

15. tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

17. /sys/kernel/mm/transparent_hugepage

defrag	[always] defer defer+madvice madvice never
enabled	[always] madvice never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECspeed®2017_int_base = 20.0

KR1180V3 (AMD EPYC 9375F)

SPECspeed®2017_int_peak = 20.5

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p2	btrfs	892G	38G	852G	5%	/home

21. /sys/devices/virtual/dmi/id

Vendor: KAYTUS
Product: KR1180-E3-A0-R0-00
Product Family: Not specified
Serial: 012345678

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400, configured at 5200

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 01.04.00
BIOS Date: 12/09/2024

Compiler Version Notes

```
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
      | 657.xz_s(base, peak)
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
C++    | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
      | 641.leela_s(base, peak)
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
Fortran | 648.exchange2_s(base, peak)
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECspeed®2017_int_base = 20.0

KR1180V3 (AMD EPYC 9375F)

SPECspeed®2017_int_peak = 20.5

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64

602.gcc_s: -DSPEC_LP64

605.mcf_s: -DSPEC_LP64

620.omnetpp_s: -DSPEC_LP64

623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64

625.x264_s: -DSPEC_LP64

631.deepsjeng_s: -DSPEC_LP64

641.leela_s: -DSPEC_LP64

648.exchange2_s: -DSPEC_LP64

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3

-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP

-flto -fremap-arrays -fstrip-mining -fstruct-layout=7

-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm

-lflang -lamdalloc

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECspeed®2017_int_base = 20.0

KR1180V3 (AMD EPYC 9375F)

SPECspeed®2017_int_peak = 20.5

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECspeed®2017_int_base = 20.0

KR1180V3 (AMD EPYC 9375F)

SPECspeed®2017_int_peak = 20.5

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

602.gcc_s: Same as 600.perlbench_s

```
605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

625.x264_s: Same as 600.perlbench_s

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

```
623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECspeed®2017_int_base = 20.0

KR1180V3 (AMD EPYC 9375F)

SPECspeed®2017_int_peak = 20.5

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

623.xalancbmk_s (continued):

-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

641.leela_s: Same as 631.deepsjeng_s

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.html>

<http://www.spec.org/cpu2017/flags/Kaytus-Platform-Settings-amd-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.xml>

<http://www.spec.org/cpu2017/flags/Kaytus-Platform-Settings-amd-V1.0.xml>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECspeed®2017_int_base = 20.0

KR1180V3 (AMD EPYC 9375F)

SPECspeed®2017_int_peak = 20.5

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-04 04:45:11-0500.
Report generated on 2025-03-26 10:32:59 by CPU2017 PDF formatter v6716.
Originally published on 2025-03-25.