



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R4900 G7 (Intel Xeon 6747P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

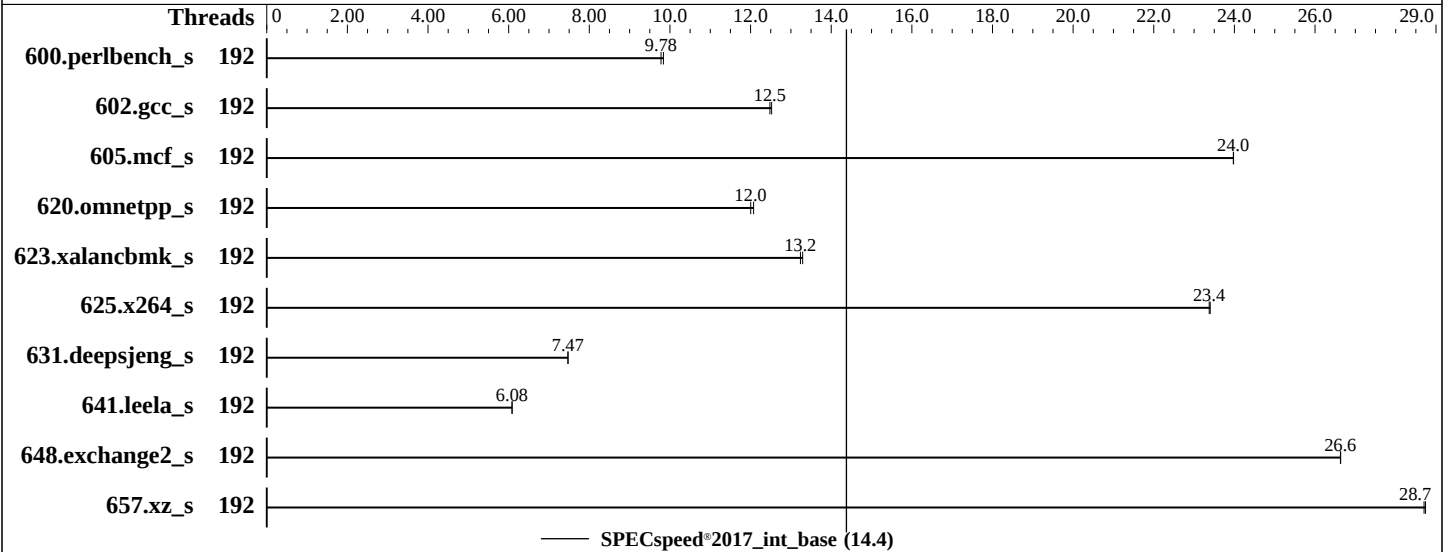

Hardware

CPU Name: Intel Xeon 6747P
Max MHz: 3900
Nominal: 2700
Enabled: 96 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 288 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 4Rx8 PC5-88/64B-M, running at 8000)
Storage: 1 x 960 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler
for Linux;
Parallel: Yes
Firmware: Version 7.00.15 released Jun-2025 BIOS
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost
of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R4900 G7 (Intel Xeon 6747P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	192	<u>182</u>	<u>9.78</u>	180	9.84									
602.gcc_s	192	318	12.5	<u>319</u>	<u>12.5</u>									
605.mcf_s	192	<u>197</u>	<u>24.0</u>	197	24.0									
620.omnetpp_s	192	<u>136</u>	<u>12.0</u>	135	12.1									
623.xalancbmk_s	192	107	13.3	<u>107</u>	<u>13.2</u>									
625.x264_s	192	75.4	23.4	<u>75.5</u>	<u>23.4</u>									
631.deepsjeng_s	192	192	7.47	<u>192</u>	<u>7.47</u>									
641.leela_s	192	<u>280</u>	<u>6.08</u>	280	6.09									
648.exchange2_s	192	110	26.6	<u>110</u>	<u>26.6</u>									
657.xz_s	192	215	28.7	<u>215</u>	<u>28.7</u>									

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R4900 G7 (Intel Xeon 6747P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes

BIOS Settings:

SNC = Enable
LLC Prefetch = Enabled

BMC Settings:

Fan mode = powerful mode

Sysinfo program /home/speccpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sat Jul 26 12:16:06 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09/lp)
x86_64 x86_64 x86_64 GNU/Linux

2. w
12:16:06 up 50 min, 1 user, load average: 0.04, 0.02, 0.00
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 12:14 6.00s 0.90s 0.00s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R4900 G7 (Intel Xeon 6747P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
pending signals          (-i) 4126214
max locked memory        (kbytes, -l) 8192
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                 (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes       (-u) 4126214
virtual memory           (kbytes, -v) unlimited
file locks               (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=192 --tune base -o all --define
  intspeedaffinity --define drop_caches intspeed -n 2
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=192 --tune base --output_format all --define
  intspeedaffinity --define drop_caches --iterations 2 --nopower --runmode speed --tune base --size refspeed
  intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.013/temlogs/preenv.intspeed.013.0.log
  --lognum 013.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6747P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000380
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 48
siblings       : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-23,64-87
physical id 1: core ids 0-23,64-87
physical id 0: apicids 0-47,128-175
physical id 1: apicids 256-303,384-431
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:     52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            192
On-line CPU(s) list: 0-191
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R4900 G7 (Intel Xeon 6747P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) 6747P
BIOS Model name: Intel(R) Xeon(R) 6747P UNKNOWN CPU @ 2.7GHZ
BIOS CPU family: 179
CPU family: 6
Model: 173
Thread(s) per core: 2
Core(s) per socket: 48
Socket(s): 2
Stepping: 1
CPU(s) scaling MHz: 24%
CPU max MHz: 3900.0000
CPU min MHz: 800.0000
BogoMIPS: 5400.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization: VT-x
L1d cache: 4.5 MiB (96 instances)
L1i cache: 6 MiB (96 instances)
L2 cache: 192 MiB (96 instances)
L3 cache: 576 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-23,96-119
NUMA node1 CPU(s): 24-47,120-143
NUMA node2 CPU(s): 48-71,144-167
NUMA node3 CPU(s): 72-95,168-191
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSB-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R4900 G7 (Intel Xeon 6747P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	64K	6M	16	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	288M	576M	16	Unified	3	294912	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-23,96-119

node 0 size: 257521 MB

node 0 free: 256592 MB

node 1 cpus: 24-47,120-143

node 1 size: 258035 MB

node 1 free: 257313 MB

node 2 cpus: 48-71,144-167

node 2 size: 258035 MB

node 2 free: 256846 MB

node 3 cpus: 72-95,168-191

node 3 size: 257992 MB

node 3 free: 256868 MB

node distances:

node	0	1	2	3
0:	10	12	21	21
1:	12	10	21	21
2:	21	21	10	12
3:	21	21	12	10

9. /proc/meminfo

MemTotal: 1056342256 kB

10. who -r

run-level 3 Jul 26 11:26

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs autovast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged ipmi ipmievdt issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R4900 G7 (Intel Xeon 6747P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

indirect systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
pcscd saned@ systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=cde72617-b8e2-4d9c-9857-372bb1c3514c
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 126:
current policy: frequency should be within 800 MHz and 3.90 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

16. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R4900 G7 (Intel Xeon 6747P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

18. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information

SPEC is set to: /home/speccpu
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda6 btrfs 819G 43G 775G 6% /home

20. /sys/devices/virtual/dmi/id

Vendor: New H3C Technologies Co., Ltd.
Product: H3C UniServer R4900 G7
Product Family: Rack
Serial: 210235A51AH259000015

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x Hynix HMC98BDJHA383N 64 GB 4 rank 8800, configured at 8000

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 7.00.15
BIOS Date: 06/03/2025
BIOS Revision: 5.35
Firmware Revision: 2.6

Compiler Version Notes

C | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 648.exchange2_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R4900 G7 (Intel Xeon 6747P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64

602.gcc_s: -DSPEC_LP64

605.mcf_s: -DSPEC_LP64

620.omnetpp_s: -DSPEC_LP64

623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX

625.x264_s: -DSPEC_LP64

631.deepsjeng_s: -DSPEC_LP64

641.leela_s: -DSPEC_LP64

648.exchange2_s: -DSPEC_LP64

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R4900 G7 (Intel Xeon 6747P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-Intel-BHS-RevA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-Intel-BHS-RevA.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-07-26 00:16:05-0400.

Report generated on 2025-08-12 15:50:49 by CPU2017 PDF formatter v6716.

Originally published on 2025-08-12.