



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R6900 G7 (Intel Xeon 6768P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2024

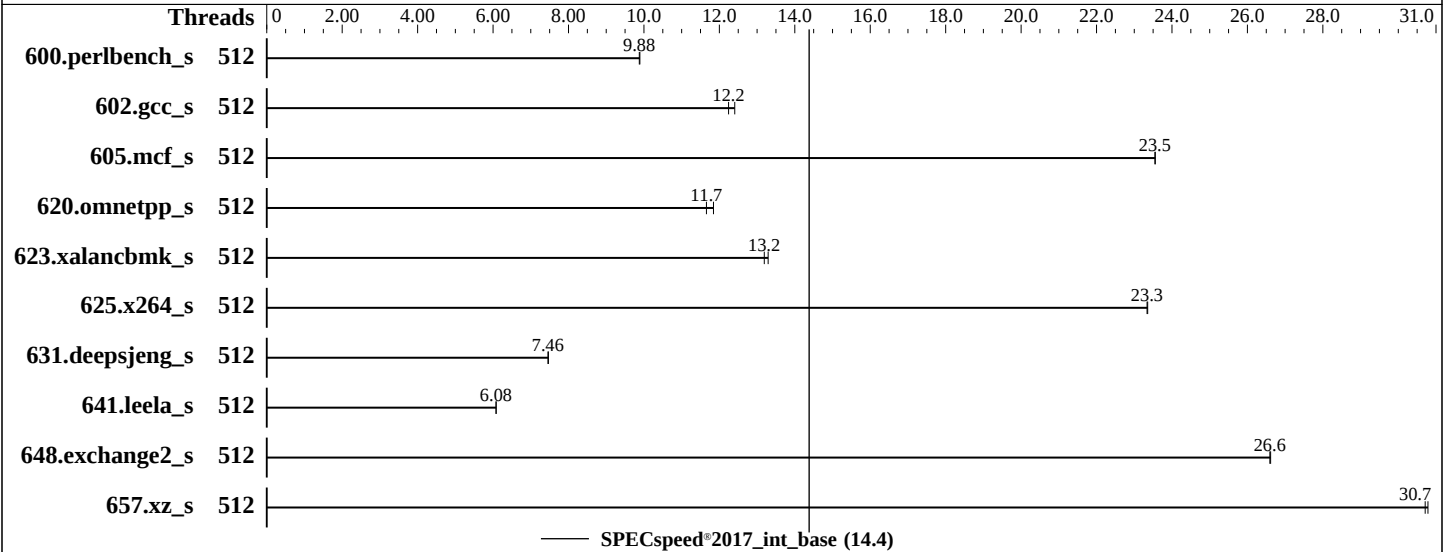

Hardware

CPU Name: Intel Xeon 6768P
Max MHz: 3900
Nominal: 2400
Enabled: 256 cores, 4 chips, 2 threads/core
Orderable: 2,4 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 1 TB (32 x 32 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 960 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler
for Linux;
Parallel: Yes
Firmware: Version 7.00.19 released Sep-2025 BIOS
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost
of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R6900 G7 (Intel Xeon 6768P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	512	179	9.89	<u>180</u>	<u>9.88</u>									
602.gcc_s	512	321	12.4	<u>325</u>	<u>12.2</u>									
605.mcf_s	512	200	23.6	<u>200</u>	<u>23.5</u>									
620.omnetpp_s	512	138	11.8	<u>140</u>	<u>11.7</u>									
623.xalancbmk_s	512	107	13.3	<u>107</u>	<u>13.2</u>									
625.x264_s	512	75.5	23.4	<u>75.6</u>	<u>23.3</u>									
631.deepsjeng_s	512	192	7.47	<u>192</u>	<u>7.46</u>									
641.leela_s	512	<u>281</u>	<u>6.08</u>	280	6.08									
648.exchange2_s	512	110	26.6	<u>111</u>	<u>26.6</u>									
657.xz_s	512	201	30.8	<u>201</u>	<u>30.7</u>									

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R6900 G7 (Intel Xeon 6768P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2024

Platform Notes

BIOS Settings:

SNC = Enable

LLC Prefetch = Enabled

ACPI C6x Enumeration = C6 as ACPI C2

BMC Settings:

Fan mode = powerful mode

Sysinfo program /home/speccpu/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Sat Oct 18 00:20:44 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
00:20:44 up 1:53, 1 user, load average: 0.30, 19.73, 88.50
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1      -             22:30    12.00s 1.59s  0.00s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R6900 G7 (Intel Xeon 6768P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
file size                (blocks, -f) unlimited
pending signals          (-i) 4125200
max locked memory        (kbytes, -l) 8192
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes       (-u) 4125200
virtual memory           (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=256 --tune base -o all --define
intspeedaffinity --define smt-on --define drop_caches intspeed -n 2
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=256 --tune base --output_format all --define
intspeedaffinity --define smt-on --define drop_caches --iterations 2 --nopower --runmode speed --tune base
--size refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.088/temlogs/preenv.intspeed.088.0.log --lognum 088.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6768P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x10003d0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 64
siblings       : 128
4 physical ids (chips)
512 processors (hardware threads)
physical id 0: core ids 0-31,64-95
physical id 1: core ids 0-31,64-95
physical id 2: core ids 0-31,64-95
physical id 3: core ids 0-31,64-95
physical id 0: apicids 0-63,128-191
physical id 1: apicids 256-319,384-447
physical id 2: apicids 512-575,640-703
physical id 3: apicids 768-831,896-959
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:                x86_64
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R6900 G7 (Intel Xeon 6768P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2024

Platform Notes (Continued)

CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 512
On-line CPU(s) list: 0-511
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) 6768P
BIOS Model name: Intel(R) Xeon(R) 6768P UNKNOWN CPU @ 2.4GHz
BIOS CPU family: 179
CPU family: 6
Model: 173
Thread(s) per core: 2
Core(s) per socket: 64
Socket(s): 4
Stepping: 1
CPU(s) scaling MHz: 22%
CPU max MHz: 3900.0000
CPU min MHz: 800.0000
BogoMIPS: 4800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization: VT-x
L1d cache: 12 MiB (256 instances)
L1i cache: 16 MiB (256 instances)
L2 cache: 512 MiB (256 instances)
L3 cache: 1.3 GiB (4 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-31,256-287
NUMA node1 CPU(s): 32-63,288-319
NUMA node2 CPU(s): 64-95,320-351
NUMA node3 CPU(s): 96-127,352-383
NUMA node4 CPU(s): 128-159,384-415
NUMA node5 CPU(s): 160-191,416-447
NUMA node6 CPU(s): 192-223,448-479
NUMA node7 CPU(s): 224-255,480-511
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R6900 G7 (Intel Xeon 6768P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	12M	12	Data	1	64	1	64
L1i	64K	16M	16	Instruction	1	64	1	64
L2	2M	512M	16	Unified	2	2048	1	64
L3	336M	1.3G	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-31,256-287
node 0 size: 128470 MB
node 0 free: 127472 MB
node 1 cpus: 32-63,288-319
node 1 size: 129007 MB
node 1 free: 128596 MB
node 2 cpus: 64-95,320-351
node 2 size: 129007 MB
node 2 free: 128611 MB
node 3 cpus: 96-127,352-383
node 3 size: 129007 MB
node 3 free: 128626 MB
node 4 cpus: 128-159,384-415
node 4 size: 128968 MB
node 4 free: 125557 MB
node 5 cpus: 160-191,416-447
node 5 size: 129007 MB
node 5 free: 124297 MB
node 6 cpus: 192-223,448-479
node 6 size: 129007 MB
node 6 free: 128451 MB
node 7 cpus: 224-255,480-511
node 7 size: 128850 MB
node 7 free: 128478 MB
node distances:
node 0 1 2 3 4 5 6 7
0: 10 12 21 21 21 21 21 21
1: 12 10 21 21 21 21 21 21
2: 21 21 10 12 21 21 21 21
3: 21 21 12 10 21 21 21 21
4: 21 21 21 21 10 12 21 21
5: 21 21 21 21 12 10 21 21
6: 21 21 21 21 21 21 10 12
7: 21 21 21 21 21 21 12 10

9. /proc/meminfo

MemTotal: 1056076936 kB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R6900 G7 (Intel Xeon 6768P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2024

Platform Notes (Continued)

10. who -r
run-level 3 Oct 17 22:28

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor auditd cron getty@ irqbalance issue-generator kbdsettings postfix purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebtables fancontrol firewalld grub2-once haveged issue-add-ssh-keys kexec-load lm_sensors lunmask rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=287cccce-a705-4048-89d9-10107c0283b3
splash=silent
resume=/dev/disk/by-uuid/48e58092-2d5c-481f-adc6-5553a102ed9a
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 398:
current policy: frequency should be within 800 MHz and 3.90 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R6900 G7 (Intel Xeon 6768P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2024

Platform Notes (Continued)

vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

16. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information
SPEC is set to: /home/speccpu
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 854G 391G 463G 46% /home

20. /sys/devices/virtual/dmi/id
Vendor: New H3C Technologies Co., Ltd.
Product: H3C UniServer R6900 G7
Product Family: Rack
Serial: 210200A0DXH259000003

21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.

Memory:
27x Hynix HMC688AHBRA290N 32 GB 2 rank 6400
5x Hynix HMC688AHBRA478N 32 GB 2 rank 6400

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 7.00.19
BIOS Date: 09/26/2025
BIOS Revision: 5.35
Firmware Revision: 2.10



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R6900 G7 (Intel Xeon 6768P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2024

Compiler Version Notes

=====
C | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++ | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran | 648.exchange2_s(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64

602.gcc_s: -DSPEC_LP64

605.mcf_s: -DSPEC_LP64

620.omnetpp_s: -DSPEC_LP64

623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX

625.x264_s: -DSPEC_LP64

631.deepsjeng_s: -DSPEC_LP64

641.leela_s: -DSPEC_LP64

648.exchange2_s: -DSPEC_LP64

657.xz_s: -DSPEC_LP64



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.4

H3C UniServer R6900 G7 (Intel Xeon 6768P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Dec-2025

Software Availability: Jun-2024

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-Intel-GNR-RevC.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-Intel-GNR-RevC.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-10-17 12:20:43-0400.

Report generated on 2025-11-05 12:10:31 by CPU2017 PDF formatter v6716.

Originally published on 2025-11-04.