



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
(AMD EPYC 9555)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Oct-2025

Hardware Availability: Sep-2025

Software Availability: Oct-2024

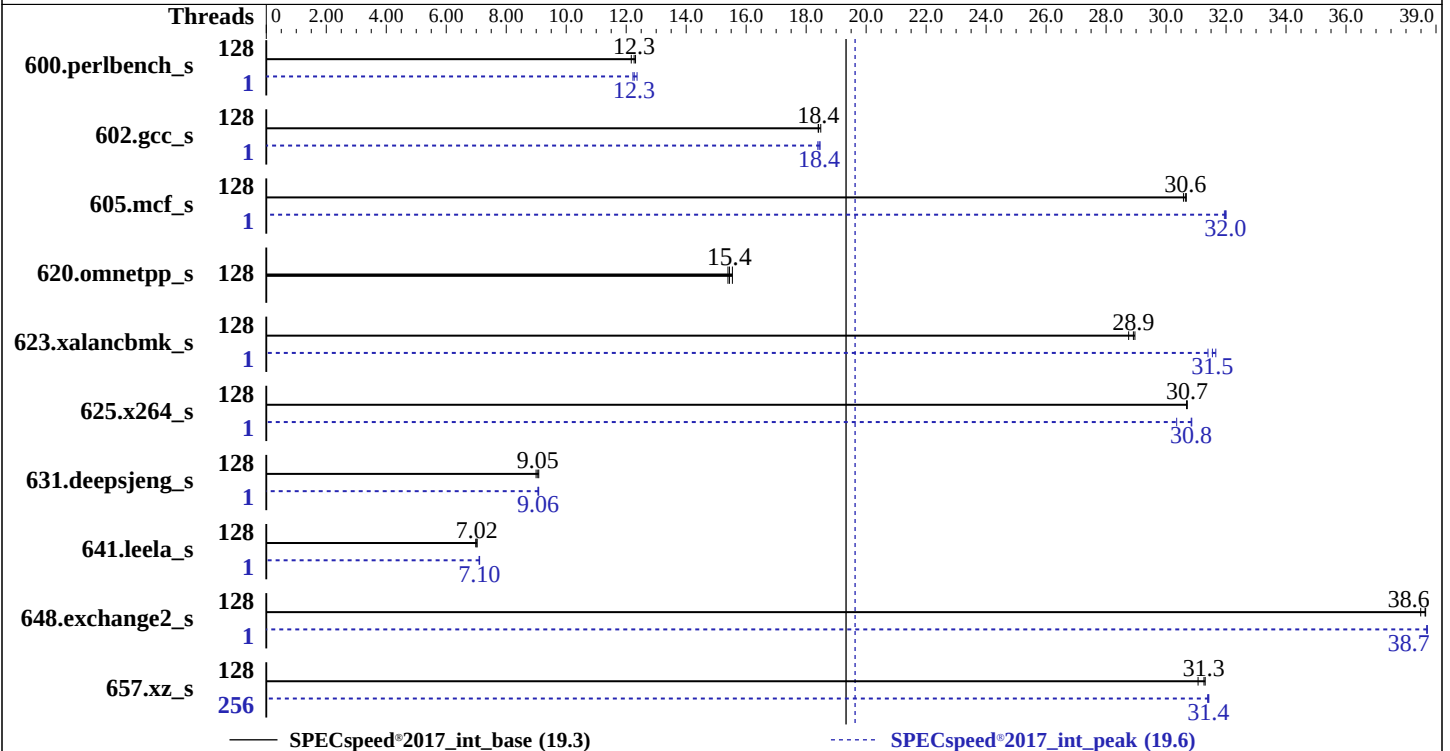

Hardware

CPU Name: AMD EPYC 9555
Max MHz: 4400
Nominal: 3200
Enabled: 128 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 1.6 TB PCIe NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6 (x86_64)
Kernel 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: Version 00.13.03.09 released Oct-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
(AMD EPYC 9555)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Sep-2025
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	128	144	12.3	146	12.2	<u>145</u>	<u>12.3</u>	1	<u>145</u>	<u>12.3</u>	144	12.4	145	12.2
602.gcc_s	128	<u>216</u>	<u>18.4</u>	215	18.5	216	18.4	1	217	18.4	216	18.5	<u>216</u>	<u>18.4</u>
605.mcf_s	128	<u>154</u>	<u>30.6</u>	154	30.7	154	30.6	1	<u>148</u>	<u>32.0</u>	148	31.9	148	32.0
620.omnetpp_s	128	<u>106</u>	<u>15.4</u>	106	15.4	105	15.5	128	<u>106</u>	<u>15.4</u>	106	15.4	105	15.5
623.xalanchmk_s	128	49.3	28.8	48.9	29.0	<u>49.0</u>	<u>28.9</u>	1	45.1	31.4	<u>44.9</u>	<u>31.5</u>	44.8	31.7
625.x264_s	128	<u>57.5</u>	<u>30.7</u>	57.5	30.7	57.5	30.7	1	<u>57.2</u>	<u>30.8</u>	58.1	30.4	57.2	30.9
631.deepsjeng_s	128	159	9.00	158	9.09	<u>158</u>	<u>9.05</u>	1	158	9.06	158	9.08	<u>158</u>	<u>9.06</u>
641.leela_s	128	<u>243</u>	<u>7.02</u>	244	6.98	243	7.03	1	<u>240</u>	<u>7.10</u>	240	7.11	240	7.10
648.exchange2_s	128	<u>76.1</u>	<u>38.6</u>	76.1	38.7	76.4	38.5	1	76.0	38.7	<u>76.0</u>	<u>38.7</u>	76.0	38.7
657.xz_s	128	199	31.1	<u>198</u>	<u>31.3</u>	197	31.3	256	<u>197</u>	<u>31.4</u>	197	31.4	197	31.4

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
(AMD EPYC 9555)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Sep-2025
Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-255"

LD_LIBRARY_PATH =

"/home/Uniautos/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/Uniautos/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "256"

Environment variables set by runcpu during the 600.perlbench_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 625.x264_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:

GOMP_CPU_AFFINITY = "0-255"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

Determinism Control = Manual

Determinism Enable = Power

TDP Control = Manual

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
(AMD EPYC 9555)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Sep-2025
Software Availability: Oct-2024

Platform Notes (Continued)

TDP = 400
PPT Control = Manual
PPT = 400
NUMA Nodes Per Socket = NPS4
APBDIS = 1
SMT Mode = Enabled

Sysinfo program /home/Uniautos/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Oct 28 22:38:31 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. w
22:38:31 up 32 min, 3 users, load average: 0.01, 1.47, 1.70
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 22:07 31:11 0.01s 0.01s -bash
root pts/0 192.168.110.207 22:07 7.00s 0.86s 0.14s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
(AMD EPYC 9555)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Sep-2025
Software Availability: Oct-2024

Platform Notes (Continued)

data seg size	(kbytes, -d)	unlimited
scheduling priority	(-e)	0
file size	(blocks, -f)	unlimited
pending signals	(-i)	3093782
max locked memory	(kbytes, -l)	2097152
max memory size	(kbytes, -m)	unlimited
open files	(-n)	1024
pipe size	(512 bytes, -p)	8
POSIX message queues	(bytes, -q)	819200
real-time priority	(-r)	0
stack size	(kbytes, -s)	unlimited
cpu time	(seconds, -t)	unlimited
max user processes	(-u)	3093782
virtual memory	(kbytes, -v)	unlimited
file locks	(-x)	unlimited

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeak
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeak intspeak --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.039/templots/preenv.intspeak.039.0.log --lognum 039.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Uniautos/cpu2017
-----
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9555 64-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb002151
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores      : 64
siblings       : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids 0-127
physical id 1: apicids 128-255
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
-----
```

7. lscpu

```
From lscpu from util-linux 2.39.3:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
(AMD EPYC 9555)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Sep-2025
Software Availability: Oct-2024

Platform Notes (Continued)

Byte Order:	Little Endian
CPU(s):	256
On-line CPU(s) list:	0-255
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9555 64-Core Processor
BIOS Model name:	AMD EPYC 9555 64-Core Processor Unknown CPU @ 3.2GHz
BIOS CPU family:	107
CPU family:	26
Model:	2
Thread(s) per core:	2
Core(s) per socket:	64
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	73%
CPU max MHz:	4409.3750
CPU min MHz:	1500.0000
BogoMIPS:	6400.01
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_lld debug_swap
Virtualization:	AMD-V
L1d cache:	6 MiB (128 instances)
L1i cache:	4 MiB (128 instances)
L2 cache:	128 MiB (128 instances)
L3 cache:	512 MiB (16 instances)
NUMA node(s):	8
NUMA node0 CPU(s):	0-15,128-143
NUMA node1 CPU(s):	16-31,144-159
NUMA node2 CPU(s):	32-47,160-175
NUMA node3 CPU(s):	48-63,176-191
NUMA node4 CPU(s):	64-79,192-207
NUMA node5 CPU(s):	80-95,208-223
NUMA node6 CPU(s):	96-111,224-239
NUMA node7 CPU(s):	112-127,240-255
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
(AMD EPYC 9555)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Oct-2025

Hardware Availability: Sep-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-15,128-143
node 0 size: 96291 MB
node 0 free: 95943 MB
node 1 cpus: 16-31,144-159
node 1 size: 96759 MB
node 1 free: 96370 MB
node 2 cpus: 32-47,160-175
node 2 size: 96759 MB
node 2 free: 96513 MB
node 3 cpus: 48-63,176-191
node 3 size: 96759 MB
node 3 free: 96519 MB
node 4 cpus: 64-79,192-207
node 4 size: 96759 MB
node 4 free: 96504 MB
node 5 cpus: 80-95,208-223
node 5 size: 96759 MB
node 5 free: 96494 MB
node 6 cpus: 96-111,224-239
node 6 size: 96759 MB
node 6 free: 96390 MB
node 7 cpus: 112-127,240-255
node 7 size: 96623 MB
node 7 free: 96348 MB
node distances:
node 0 1 2 3 4 5 6 7
0: 10 12 12 12 32 32 32 32
1: 12 10 12 12 32 32 32 32
2: 12 12 10 12 32 32 32 32
3: 12 12 12 10 32 32 32 32
4: 32 32 32 32 10 12 12 12
5: 32 32 32 32 12 10 12 12
6: 32 32 32 32 12 12 10 12
7: 32 32 32 32 12 12 12 10

9. /proc/meminfo

MemTotal: 792035096 kB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
(AMD EPYC 9555)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Sep-2025
Software Availability: Oct-2024

Platform Notes (Continued)

10. who -r
run-level 3 Oct 28 22:05

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@
irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info fsidd
gpm grub2-once haveged ipmi ipmievdev issue-add-ssh-keys kexec-load lunmask man-db-create
multipathd nfs nfs-blkmap powertop rpcbind rpmconfigcheck rsyncd serial-getty@
smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
vncserver@
indirect systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=598ff54f-84bd-49cf-aeb1-10c5c5f6050f
splash=silent
quiet
mitigations=auto
security=apparmor

14. cpupower frequency-info
analyzing CPU 104:
current policy: frequency should be within 1.50 GHz and 3.20 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. tuned-adm active
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: latency-performance

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
(AMD EPYC 9555)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Sep-2025
Software Availability: Oct-2024

Platform Notes (Continued)

```
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio       1
vm.nr_hugepages              0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                 1
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         1
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

```
-----
20. Disk information
SPEC is set to: /home/Uniautos/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs 1.4T 42G 1.4T 3% /
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:      XFUSION
Product:     2258H V8
Product Family: Turin
```

```
-----
22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
1x SK Hynix HMC88AHB476N 32 GB 2 rank 6400
23x SK Hynix HMC88AHB478N 32 GB 2 rank 6400
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      XFUSION
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
(AMD EPYC 9555)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Sep-2025
Software Availability: Oct-2024

Platform Notes (Continued)

BIOS Version: 00.13.03.09
BIOS Date: 10/13/2025
BIOS Revision: 3.9

Compiler Version Notes

```
=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
      | 657.xz_s(base, peak)
=====
```

```
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====
```

```
=====
C++    | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
      | 641.leela_s(base, peak)
=====
```

```
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====
```

```
=====
Fortran | 648.exchange2_s(base, peak)
=====
```

```
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
(AMD EPYC 9555)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Oct-2025

Hardware Availability: Sep-2025

Software Availability: Oct-2024

Base Portability Flags (Continued)

602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fvecLib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fvecLib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fvecLib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
(AMD EPYC 9555)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Oct-2025

Hardware Availability: Sep-2025

Software Availability: Oct-2024

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
(AMD EPYC 9555)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Oct-2025

Hardware Availability: Sep-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

602.gcc_s: Same as 600.perlbench_s

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

625.x264_s: Same as 600.perlbench_s

657.xz_s: Same as 600.perlbench_s

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

641.leela_s: Same as 631.deepsjeng_s

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
(AMD EPYC 9555)

SPECspeed®2017_int_base = 19.3

SPECspeed®2017_int_peak = 19.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: Sep-2025
Software Availability: Oct-2024

Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

-Wl, -mllvm -Wl, -lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.8.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.8.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-10-28 10:38:30-0400.

Report generated on 2025-11-19 10:38:46 by CPU2017 PDF formatter v6716.

Originally published on 2025-11-18.