



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 265

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

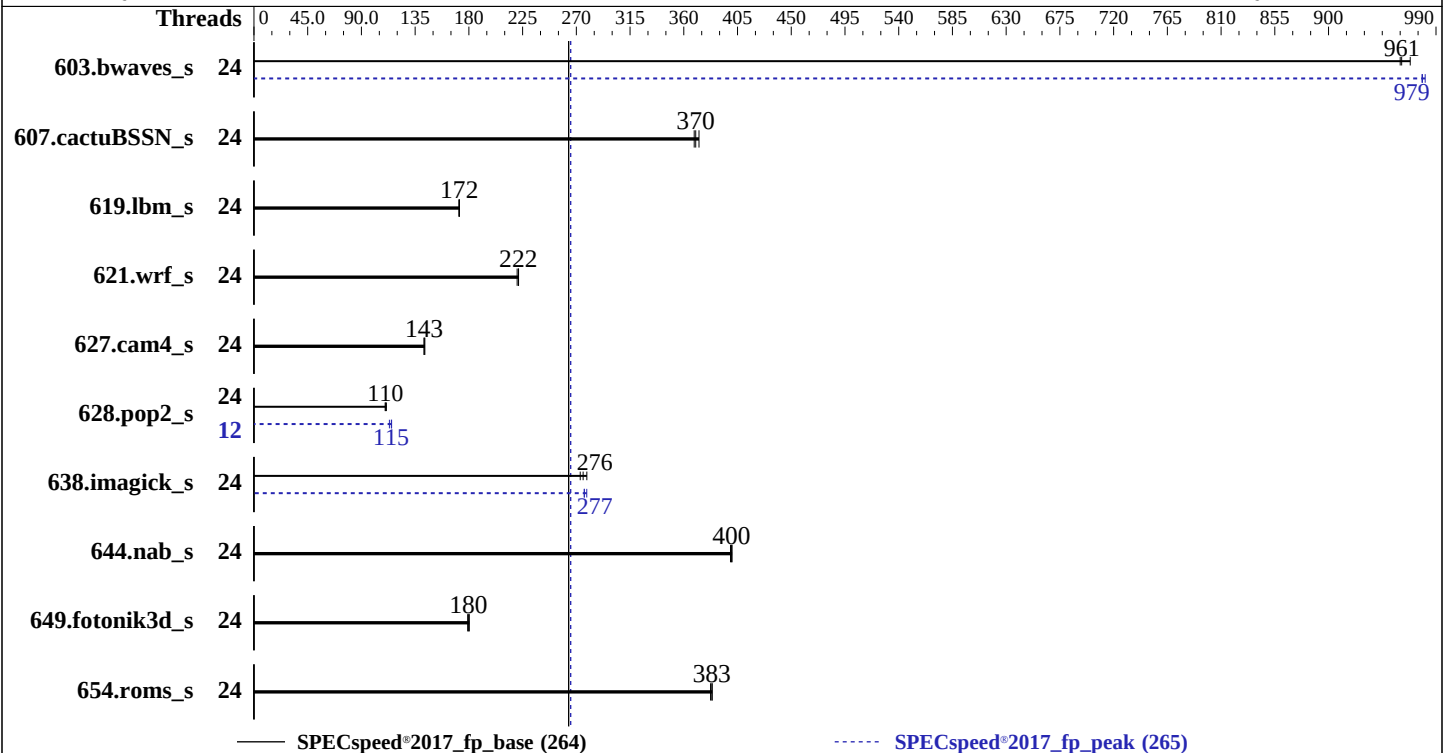

Hardware

CPU Name: AMD EPYC 9275F
Max MHz: 4800
Nominal: 4100
Enabled: 24 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 3 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage: 1 x 1.8 TB NVME SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: HPE BIOS Version v1.20 07/11/2025 released Jul-2025
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 265

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	24	61.5	960	<u>61.4</u>	<u>961</u>	60.9	968	24	60.1	981	<u>60.3</u>	<u>979</u>	60.3	978
607.cactuBSSN_s	24	45.2	369	44.7	373	<u>45.1</u>	<u>370</u>	24	45.2	369	44.7	373	<u>45.1</u>	<u>370</u>
619.lbm_s	24	<u>30.5</u>	<u>172</u>	30.5	172	30.4	172	24	<u>30.5</u>	<u>172</u>	30.5	172	30.4	172
621.wrf_s	24	60.0	220	<u>59.7</u>	<u>222</u>	59.7	222	24	60.0	220	<u>59.7</u>	<u>222</u>	59.7	222
627.cam4_s	24	61.9	143	<u>62.2</u>	<u>143</u>	62.2	143	24	61.9	143	<u>62.2</u>	<u>143</u>	62.2	143
628.pop2_s	24	<u>108</u>	<u>110</u>	107	111	108	110	12	<u>103</u>	<u>115</u>	105	113	103	115
638.imagick_s	24	<u>52.3</u>	<u>276</u>	51.7	279	52.8	273	24	51.8	279	52.1	277	<u>52.1</u>	<u>277</u>
644.nab_s	24	<u>43.7</u>	<u>400</u>	43.6	400	43.8	399	24	<u>43.7</u>	<u>400</u>	43.6	400	43.8	399
649.fotonik3d_s	24	50.9	179	<u>50.7</u>	<u>180</u>	50.5	180	24	50.9	179	<u>50.7</u>	<u>180</u>	50.5	180
654.roms_s	24	41.2	382	<u>41.1</u>	<u>383</u>	41.0	384	24	41.2	382	<u>41.1</u>	<u>383</u>	41.0	384

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 265

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 265

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-47"

LD_LIBRARY_PATH =

"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "48"

Environment variables set by runcpu during the 603.bwaves_s peak run:

GOMP_CPU_AFFINITY = "0-23"

Environment variables set by runcpu during the 628.pop2_s peak run:

GOMP_CPU_AFFINITY = "0-11"

Environment variables set by runcpu during the 638.imagick_s peak run:

GOMP_CPU_AFFINITY = "0-23"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to Four memory domains per socket

Thermal Configuration set to Enhanced CPU Cooling

Workload Profile set to Custom

Power Regulator set to OS Control Mode

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on r15-bm-02 Wed Jul 9 12:27:12 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
2. w
3. Username

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 265

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
1. uname -a
Linux r15-bm-02 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09/lp)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
12:27:12 up 2 days, 5:27, 4 users, load average: 7.15, 5.57, 3.47
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU WHAT
root      pts/1    10.79.30.185: 00:33      2:25m    0.96s   0.27s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3093195
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3093195
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
SCREEN -S cpu
/bin/bash
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 265

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
python3 ./run_intspeed.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.017/temlogs/preenv.fpspeed.017.0.log --lognum 017.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9275F 24-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb002151
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 24
siblings        : 48
1 physical ids (chips)
48 processors (hardware threads)
physical id 0:  core ids 0-2,8-10,16-18,24-26,32-34,40-42,48-50,56-58
physical id 0:  apicids 0-5,16-21,32-37,48-53,64-69,80-85,96-101,112-117
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            48
On-line CPU(s) list: 0-47
Vendor ID:         AuthenticAMD
Model name:        AMD EPYC 9275F 24-Core Processor
CPU family:        26
Model:             2
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s):         1
Stepping:          1
Frequency boost:    enabled
CPU(s) scaling MHz: 95%
CPU max MHz:       4100.0000
CPU min MHz:       1500.0000
BogoMIPS:          8199.76
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 265

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

smeop bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap

AMD-V

Virtualization:

L1d cache:

1.1 MiB (24 instances)

L1i cache:

768 KiB (24 instances)

L2 cache:

24 MiB (24 instances)

L3 cache:

256 MiB (8 instances)

NUMA node(s):

1

NUMA node0 CPU(s):

0-47

Vulnerability Gather data sampling:

Not affected

Vulnerability Itlb multihit:

Not affected

Vulnerability L1tf:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Reg file data sampling:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec rstack overflow:

Not affected

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	1M	24M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0-47

node 0 size: 773329 MB

node 0 free: 771266 MB

node distances:

node 0

0: 10

9. /proc/meminfo

MemTotal: 791889568 kB

10. who -r

run-level 5 Jul 7 07:00

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 265

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)

Default Target Status
graphical running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled

ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
bluetooth cron display-manager getty@ irqbalance iscsi issue-generator kbdsettings klog
lvm2-monitor nsd nvme-fc-boot-connections nvme-fc-autoconnect oracle postfix purge-kernels
rollback rsyslog sapconf smartd sshd sysctl-logger systemd-pstore virtqemu virtxend
wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant xencommons

enabled-runtime

systemd-fsck-root systemd-remount-fs

disabled

NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon amavis
apache2 apache2@ autofs autovast-initscripts bgpd blk-availability bluetooth-mesh
boot-sysctl booth-arbitrator booth@ ca-certificates certmonger chrony-wait chronyd
clamav-milter clamd clamondacc console-getty corosync corosync-notifyd crm_mon ctdb cups
cups-browsed ddclient debug-shell dhcpd dhcpd6 dhcrelay dhcrelay6 dirsrv@ dlm dnsmasq drbd
drbd-lvchange@ drbd-wait-promotable@ ebttables exchange-bmc-os-info fetchmail firewallld
fsidd gpm grub2-once haveged hawk hwloc-dump-hwdata ipmi ipmievdp ipvsadm iscsi-init iscsid
isisd issue-add-ssh-keys kexec-load ksm kvm_stat ldirectord libvirt-guests logd lunmask
lvmlockd lvmlocks man-db-create mariadb mariadb@ multipathd named nfs nfs-blkmap
nfs-server nfsserver nmb openvpn@ ospf6d ospfd ostree-remount pacemaker racoon
racoon-setkey radvd rarpd@ ripd ripngd rpcbind rpmconfigcheck rsyncd rtkit-daemon sanlock
sbd sbd_remote serial-getty@ smartd_generate_opts smb snmpd snmptrapd spamd spampd
speech-dispatcherd squid srp_daemon srp_daemon_port@ strongswan strongswan-starter
svnserve sysstat systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-nspawn@ systemd-sysext systemd-time-wait-sync systemd-timesyncd tcsh udisks2
update-system-flatpaks upower virtinterfaced virtlockd virtlogd virtnetworkd virtnodeudev
virtnwfilterd virtsecret virtstoraged vncserver@ vsftpd wdm winbind wpa_supplicant@
xen-dom0-modules xen-init-dom0 xen-qemu-dom0-disk-backend xen-watchdog xenconsole
xendomains xenstored zebra

indirect

pcscd saned@ systemd-userdbd tftpd uidd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default

root=UUID=566b550a-b4e8-48d0-9bfc-e3063e24f965

splash=silent

mitigations=auto

quiet

security=apparmor

14. cpupower frequency-info

analyzing CPU 30:

current policy: frequency should be within 1.50 GHz and 4.10 GHz.

The governor "performance" may decide which speed to use
within this range.

boost state support:

Supported: yes

Active: yes

15. sysctl

kernel.numa_balancing 0

kernel.randomize_va_space 0

vm.compaction_proactiveness 20

vm.dirty_background_bytes 314572800

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 265

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
vm.dirty_background_ratio      0
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvice madvice never
enabled     [always] madvice never
hpage_pmd_size  2097152
shmem_enabled always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared          256
max_ptes_swap            64
pages_to_scan           4096
scan_sleep_millisecs    10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3 ext4  1.8T   20G  1.7T   2% /
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:      HPE
Product:     HPE ProLiant Compute DL345 Gen12
Product Family: ProLiant
Serial:      SANJACSCM
-----
```

```
-----
21. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  9x Hynix HMC94AHBRA480N 64 GB 2 rank 6400, configured at 5200
  1x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400, configured at 5200
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 265

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

2x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400, configured at 5200

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.20
BIOS Date: 07/11/2025
BIOS Revision: 1.20
Firmware Revision: 1.16

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 265

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 265

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -fltto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -fltto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -fltto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=2000000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 265

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp

-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining

-fstruct-layout=9 -mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp

-lamdlibm -lamdalloc -lflang

644.nab_s: basepeak = yes

Fortran benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 265

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -fscalar-transform -fvector-transform
-mllvm -reduce-array-computations=3 -Mrecursive
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fscalar-transform
-fvector-transform -Mrecursive -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 265

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.7.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.7.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-07-09 13:27:12-0400.

Report generated on 2025-11-19 10:39:20 by CPU2017 PDF formatter v6716.

Originally published on 2025-11-18.