



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6700 G6 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 1450

SPECrate®2017_fp_peak = 1500

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Oct-2023

Software Availability: Jun-2024

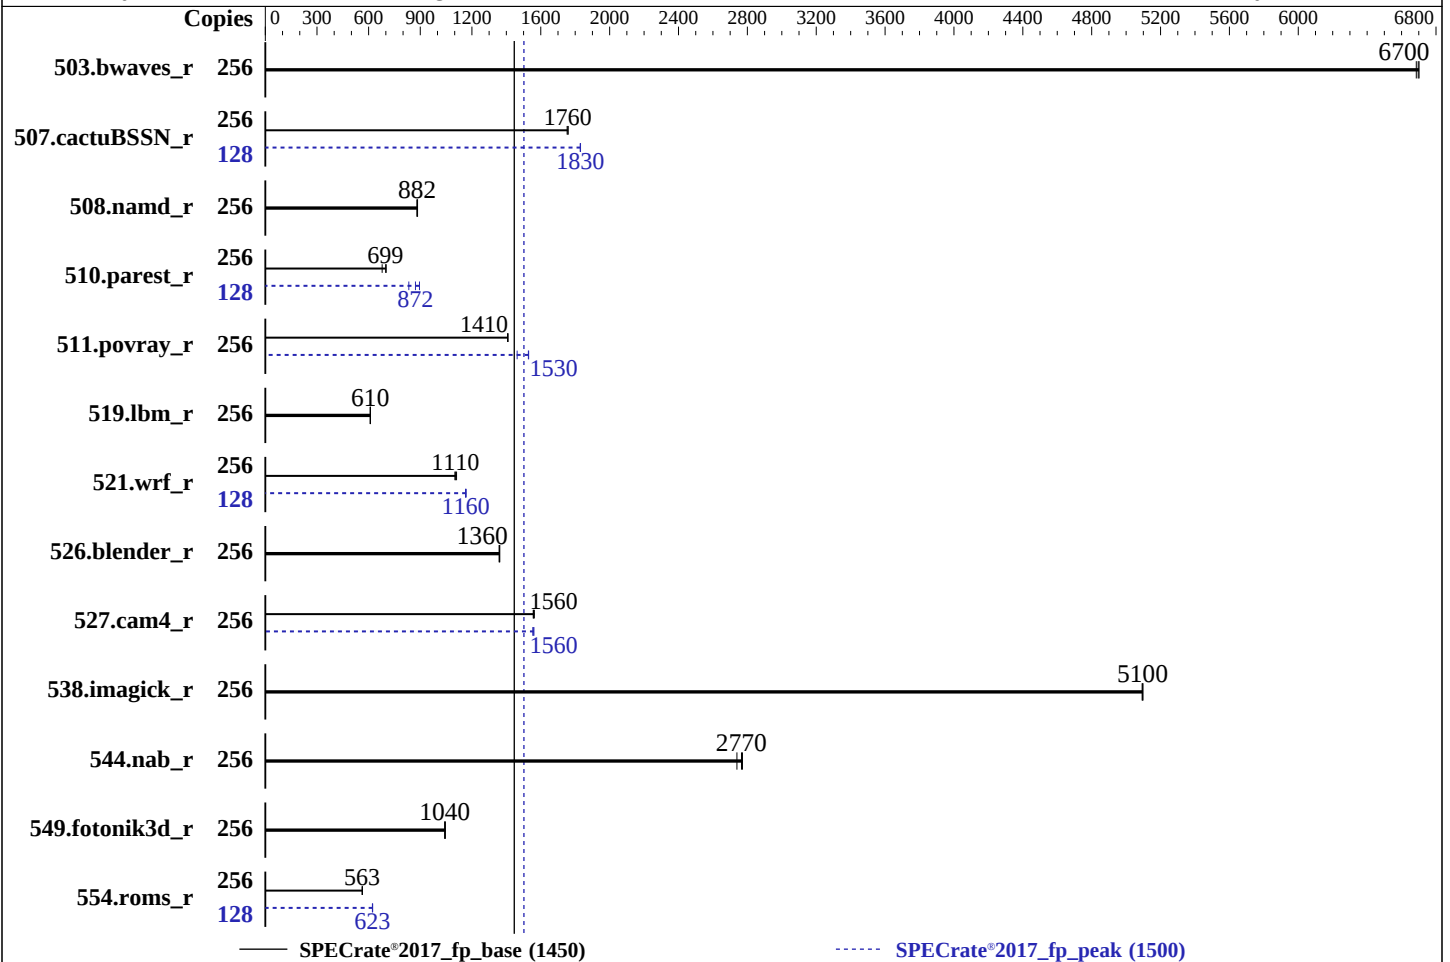

Hardware

CPU Name: Intel Xeon Gold 6448H
Max MHz: 4100
Nominal: 2400
Enabled: 128 cores, 4 chips, 2 threads/core
Orderable: 1,2,4 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 60 MB I+D on chip per chip
Other: None
Memory: 2 TB (32 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)
Storage: 1 x 960 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 6.10.53 released Jun-2025 BIOS
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.
H3C UniServer R6700 G6 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 1450

SPECrate®2017_fp_peak = 1500

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Oct-2023

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	384	6690	383	6700	383	6700	256	384	6690	383	6700	383	6700
507.cactuBSSN_r	256	184	1760	184	1760	185	1750	128	88.5	1830	88.6	1830	88.5	1830
508.namd_r	256	276	882	276	881	275	884	256	276	882	276	881	275	884
510.parest_r	256	958	699	954	702	987	679	128	402	833	384	872	374	895
511.povray_r	256	424	1410	425	1410	424	1410	256	391	1530	391	1530	409	1460
519.lbm_r	256	442	610	442	610	442	610	256	442	610	442	610	442	610
521.wrf_r	256	519	1110	521	1100	516	1110	128	247	1160	246	1160	246	1170
526.blender_r	256	286	1360	287	1360	287	1360	256	286	1360	287	1360	287	1360
527.cam4_r	256	288	1560	286	1560	287	1560	256	287	1560	288	1550	288	1560
538.imagick_r	256	125	5100	125	5090	125	5100	256	125	5100	125	5090	125	5100
544.nab_r	256	156	2770	155	2770	157	2740	256	156	2770	155	2770	157	2740
549.fotonik3d_r	256	954	1050	958	1040	956	1040	256	954	1050	958	1040	956	1040
554.roms_r	256	722	563	722	564	723	563	128	327	623	327	622	326	623

SPECrate®2017_fp_base = 1450

SPECrate®2017_fp_peak = 1500

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6700 G6 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 1450

SPECrate®2017_fp_peak = 1500

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Oct-2023

Software Availability: Jun-2024

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

SNC = Enable SNC2 (2-clusters)

Package C State = C6(Retention) state

CPU C6 report = Enabled

BMC Settings:

Fan mode = powerful mode

Sysinfo program /home/speccpu/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri Oct 31 23:17:54 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
-
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
 2. w
23:17:54 up 6:21, 1 user, load average: 0.05, 0.06, 1.04

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6700 G6 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 1450

SPECrate®2017_fp_peak = 1500

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Oct-2023

Software Availability: Jun-2024

Platform Notes (Continued)

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	-	16:57	42.00s	5.44s	0.19s	-bash

3. Username

From environment variable \$USER: root

4. ulimit -a

core file size	(blocks, -c)	unlimited
data seg size	(kbytes, -d)	unlimited
scheduling priority	(-e)	0
file size	(blocks, -f)	unlimited
pending signals	(-i)	8255024
max locked memory	(kbytes, -l)	8192
max memory size	(kbytes, -m)	unlimited
open files	(-n)	1024
pipe size	(512 bytes, -p)	8
POSIX message queues	(bytes, -q)	819200
real-time priority	(-r)	0
stack size	(kbytes, -s)	unlimited
cpu time	(seconds, -t)	unlimited
max user processes	(-u)	8255024
virtual memory	(kbytes, -v)	unlimited
file locks	(-x)	unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=128 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=128 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.148/templots/preenv.fprate.148.0.log --lognum 148.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6448H
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 8
microcode       : 0x2b000639
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores       : 32
siblings        : 64
4 physical ids (chips)
256 processors (hardware threads)
physical id 0:  core ids 0-31
physical id 1:  core ids 0-31
physical id 2:  core ids 0-31
physical id 3:  core ids 0-31
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6700 G6 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 1450

SPECrate®2017_fp_peak = 1500

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Oct-2023

Software Availability: Jun-2024

Platform Notes (Continued)

physical id 0: apicids 0-63
physical id 1: apicids 128-191
physical id 2: apicids 256-319
physical id 3: apicids 384-447

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      256
On-line CPU(s) list:        0-255
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                  Intel(R) Xeon(R) Gold 6448H
BIOS Model name:             Intel(R) Xeon(R) Gold 6448H Unknown CPU @ 2.4GHz
BIOS CPU family:             179
CPU family:                  6
Model:                       143
Thread(s) per core:         2
Core(s) per socket:         32
Socket(s):                   4
Stepping:                    8
CPU(s) scaling MHz:         24%
CPU max MHz:                 4100.0000
CPU min MHz:                 800.0000
BogoMIPS:                    4800.00
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                             xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                             tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                             3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                             ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                             vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                             rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                             clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                             xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                             split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                             arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req hfi vnmi
                             avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                             avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                             bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                             serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                             amx_int8 flush_l1d arch_capabilities
Virtualization:              VT-x
L1d cache:                   6 MiB (128 instances)
L1i cache:                   4 MiB (128 instances)
L2 cache:                    256 MiB (128 instances)
L3 cache:                    240 MiB (4 instances)
NUMA node(s):                8
NUMA node0 CPU(s):           0-15,128-143
NUMA node1 CPU(s):           16-31,144-159
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6700 G6 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 1450

SPECrate®2017_fp_peak = 1500

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Oct-2023

Software Availability: Jun-2024

Platform Notes (Continued)

NUMA node2 CPU(s): 32-47,160-175
NUMA node3 CPU(s): 48-63,176-191
NUMA node4 CPU(s): 64-79,192-207
NUMA node5 CPU(s): 80-95,208-223
NUMA node6 CPU(s): 96-111,224-239
NUMA node7 CPU(s): 112-127,240-255
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRB-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	60M	240M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-15,128-143
node 0 size: 257620 MB
node 0 free: 253953 MB
node 1 cpus: 16-31,144-159
node 1 size: 258039 MB
node 1 free: 255062 MB
node 2 cpus: 32-47,160-175
node 2 size: 258039 MB
node 2 free: 254969 MB
node 3 cpus: 48-63,176-191
node 3 size: 258039 MB
node 3 free: 254884 MB
node 4 cpus: 64-79,192-207
node 4 size: 258039 MB
node 4 free: 255058 MB
node 5 cpus: 80-95,208-223
node 5 size: 258000 MB
node 5 free: 255034 MB
node 6 cpus: 96-111,224-239
node 6 size: 258039 MB
node 6 free: 255050 MB
node 7 cpus: 112-127,240-255
node 7 size: 257962 MB
node 7 free: 254997 MB
node distances:
node 0 1 2 3 4 5 6 7
0: 10 12 21 21 21 21 21 21

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6700 G6 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 1450

SPECrate®2017_fp_peak = 1500

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Oct-2023

Software Availability: Jun-2024

Platform Notes (Continued)

```
1: 12 10 21 21 21 21 21 21
2: 21 21 10 12 21 21 21 21
3: 21 21 12 10 21 21 21 21
4: 21 21 21 21 10 12 21 21
5: 21 21 21 21 12 10 21 21
6: 21 21 21 21 21 21 10 12
7: 21 21 21 21 21 21 12 10
```

```
9. /proc/meminfo
MemTotal:      2113312108 kB
```

```
10. who -r
run-level 3 Oct 31 16:57
```

```
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target   Status
multi-user       running
```

```
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled apparmor auditd cron getty@ irqbalance issue-generator kbdsettings postfix purge-kernels
rollback smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny
enabled-runtime systemd-remount-fs
disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebttables
fancontrol firewalld grub2-once haveged issue-add-ssh-keys kexec-load lm_sensors lunmask
rpmconfigcheck serial-getty@ smartd_generate_opts systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd tuned
indirect systemd-userdbd wickedd
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=287cccce-a705-4048-89d9-10107c0283b3
splash=silent
resume=/dev/disk/by-uuid/48e58092-2d5c-481f-adc6-5553a102ed9a
mitigations=auto
quiet
security=apparmor
```

```
14. cpupower frequency-info
analyzing CPU 43:
current policy: frequency should be within 800 MHz and 4.10 GHz.
The governor "performance" may decide which speed to use
within this range.

boost state support:
Supported: yes
Active: yes
```

```
15. tuned-adm active
Current active profile: throughput-performance
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6700 G6 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 1450

SPECrate®2017_fp_peak = 1500

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Oct-2023

Software Availability: Jun-2024

Platform Notes (Continued)

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

17. /sys/kernel/mm/transparent_hugepage

defrag	always defer defer+madvice [madvice] never
enabled	[always] madvice never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information

SPEC is set to: /home/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	854G	390G	465G	46%	/home

21. /sys/devices/virtual/dmi/id

Vendor:	New H3C Technologies Co., Ltd.
Product:	H3C UniServer R6700 G6
Product Family:	Rack
Serial:	210235A4J6H24A000010

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6700 G6 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 1450

SPECrate®2017_fp_peak = 1500

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Oct-2023

Software Availability: Jun-2024

Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x Hynix HMC94AGBRA181N 64 GB 2 rank 5600, configured at 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.

BIOS Version: 6.10.53

BIOS Date: 06/05/2025

BIOS Revision: 5.32

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.
H3C UniServer R6700 G6 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 1450

SPECrate®2017_fp_peak = 1500

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Oct-2023

Software Availability: Jun-2024

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6700 G6 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 1450

SPECrate®2017_fp_peak = 1500

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Oct-2023

Software Availability: Jun-2024

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6700 G6 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 1450

SPECrate®2017_fp_peak = 1500

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Oct-2023

Software Availability: Jun-2024

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6700 G6 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 1450

SPECrate®2017_fp_peak = 1500

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Oct-2023

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl, -z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl, -z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl, -z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl, -z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-intel-RevB.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-intel-RevB.xml



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6700 G6 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 1450

SPECrate®2017_fp_peak = 1500

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025

Hardware Availability: Oct-2023

Software Availability: Jun-2024

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-10-31 11:17:54-0400.

Report generated on 2025-11-19 10:40:45 by CPU2017 PDF formatter v6716.

Originally published on 2025-11-18.