SPEC CFP95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Sun Microsystems
Ultra Enterprise 4001/1

SPECfp_rate95 = 104

SPECfp_rate_base95 = 99.8

SPEC license # 6	Tested By: Sun, Mountain View	Test Date: Nov-96	Hardware Avail: Jan-97	Software Avail: Nov-96

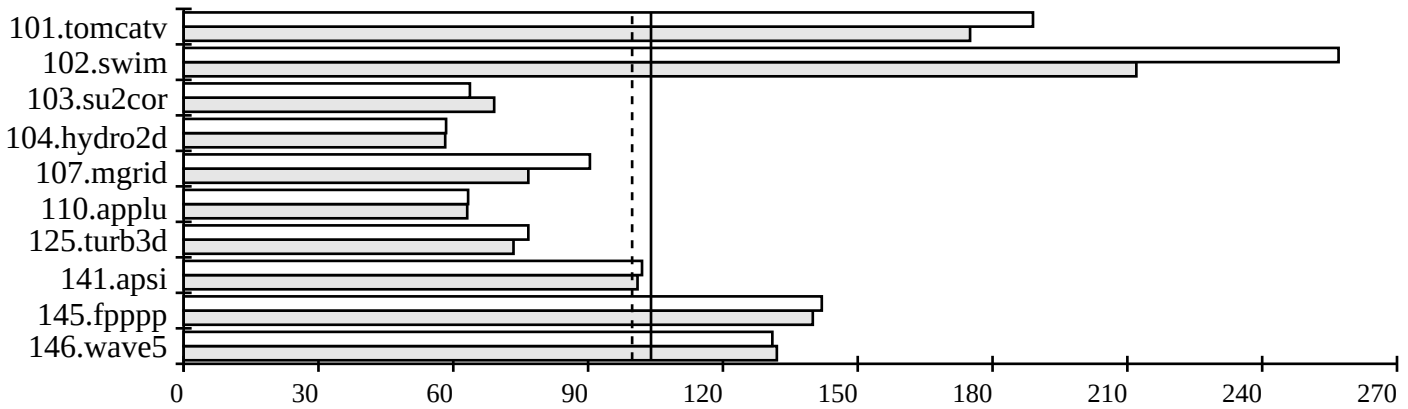

Hardware/Software Configuration for:
Ultra Enterprise 4001/1

Hardware

Model Name:	Ultra Enterprise 4001
CPU:	250MHz UltraSPARC II
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	16KBI+16KBD on chip
Secondary Cache:	1024KB(I+D) off chip
Other Cache:	None
Memory:	3GB
Disk Subsystem:	2 x 2GB
Other Hardware:	Fast Ethernet

Software

Operating System:	Solaris 2.5.1
Compiler:	Sun f77 4.2 alpha
File System:	UFS
System State:	Multiuser

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
101.tomcatv	1	190	175	1	176	189
102.swim	1	364	212	1	301	257
103.su2cor	1	182	69.1	1	198	63.7
104.hydro2d	1	371	58.2	1	370	58.4
107.mgrid	1	293	76.7	1	249	90.4
110.applu	1	314	63.1	1	313	63.3
125.turb3d	1	503	73.4	1	481	76.7
141.apsi	1	188	101	1	185	102
145.fpppp	1	619	140	1	610	142
146.wave5	1	204	132	1	206	131
SPECfp_rate_base95 (G. Mean)			99.8			
SPECfp_rate95 (G. Mean)						104

Notes/Tuning Information

```
Baseline: -fast -xO5 -xdepend -xarch=v8plusa
Peak: FULTRA= -xarch=v8plusa -xchip=ultra -Qoption cg -Qiselect-funcalign=32,-Qicache-L1-bsize=4-bbits=7
101.tomcatv: -fast -xO4 -xdepend ${FULTRA} -xpad=local -xpad=common
102.swim: -fast -xO4 -xdepend ${FULTRA} -xpad=local -xpad=common -dn
103.su2cor: -fast -xO4 -xdepend -xtarget=ultra -xarch=v8plusa -Qoption iropt -O4+vector -Qoption cg -Qms_pipe+nfll=5 -lmvec -dn
104.hydro2d: -fast -xO5 -xdepend -xarch=v8plusa -xsafe=mem -Qoption iropt -O4+pde ${FULTRA} -xprofile=use
107.mgrid: -fast -xO4 -xdepend -xtarget=ultra -xarch=v8plus
110.applu: -fast -xO5 -xdepend ${FULTRA} -dn -xprofile=use
125.turb3d: -fast -xO5 -xdepend -xsafe=mem -xpad=local -xpad=common ${FULTRA} -xprofile=use
141.apsi: -fast -xO4 -xdepend -xarch=v8plus -fsimple=2 -dn
145.fpppp: -fast -xO5 -xdepend -xsafe=mem ${FULTRA} -dn -xprofile=use
146.wave5: -fast -xO4 -xdepend -xarch=v8plus -xprofile=use
Config Version @(#)grover1003.cfg 1.59 96/07/23
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org